



Product Details

Pure Light Series




Lamp Beads

Rather than using small 30mil chips, we opted for 38 – 45mil to provide a stronger and more consistent level of performance. We also use a 30° angle lens to reduce light wastage, ensuring you can take a full advantage of all lights that your device creates.




Pure Light Digital Control System

The digital control system is easy to operate and has a cost-effective price. It adopts an inwardly recessed design at the corners to make the control panel and the panel lights look more aesthetically pleasing.

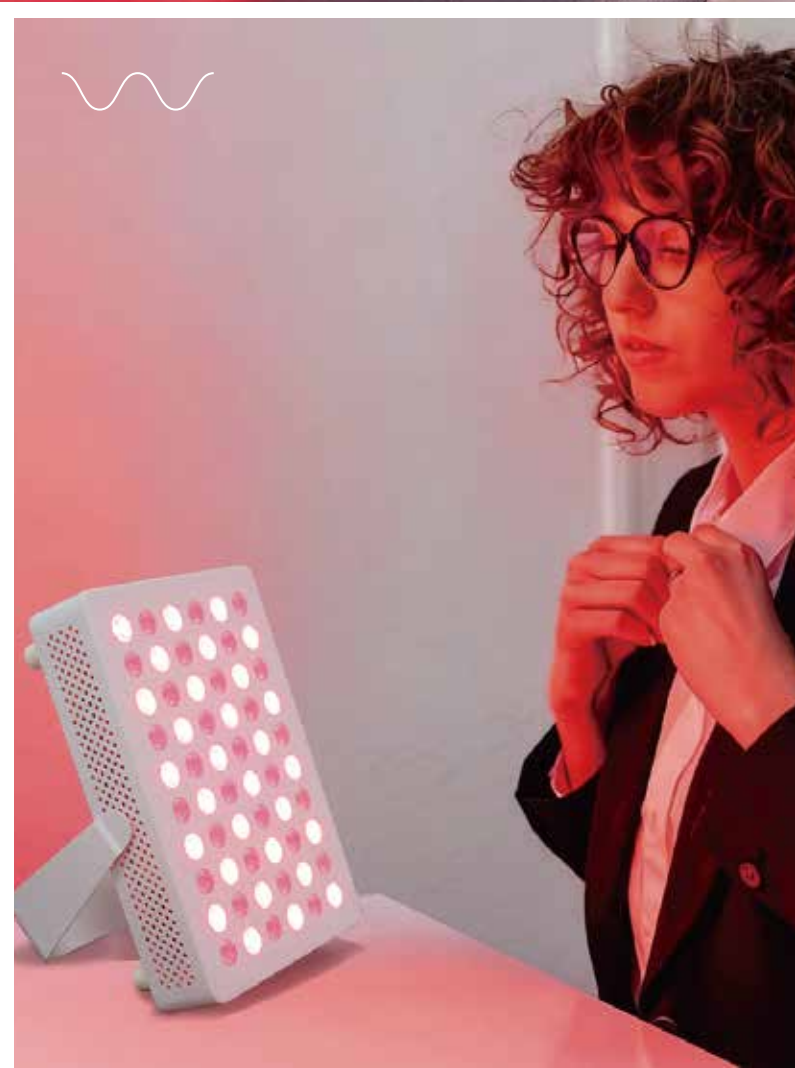

High-quality Material, High-quality Build

This full-body red light therapy device is made of iron shell, which has an excellent heat dissipation effect. The matte surface is more scratch-resistant and can keep your device looking brand new for a long time.

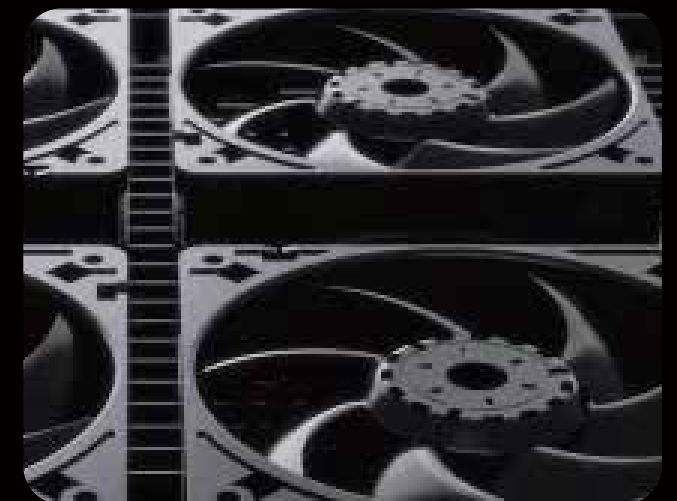


Patented Maximum Uptime Technology

Our state-of-the-art server fans are fitted around the device to ensure optimal airflow, keeping all the important components cool and working. Everything is designed with performance and user experience in mind. Not only that, but the advanced maximum uptime technology ensures long-term reliability for your device, making it not only treatment-efficient but cost-efficient too.

Red Light Therapy Panel

Pure Light Series

5-Wavelength Vera Digital Control System

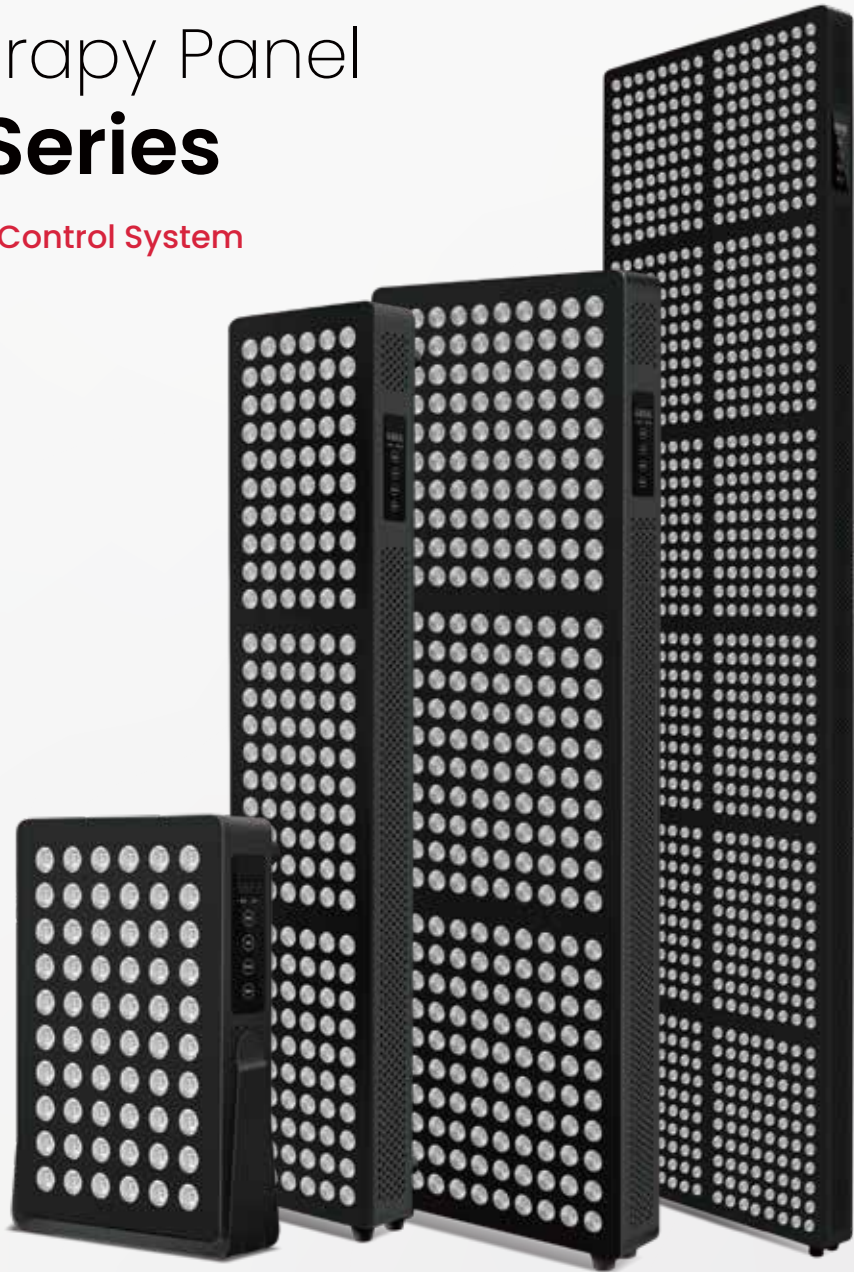

White Black

*Other colors available upon request

MDL FDA 510K TGA MDSAP UK CA Intertek TÜVRheinland PS E CE FC SGS RoHS ISO9001 global-mark

Pure light Series: Iron with painting

Ultra-simplified design, excellent surface coating

High cost-effectiveness, suitable for home and commercial use

5-wave/7-wave + customized wavelengths

Ultra-high irradiance up to 190mw/cm²

Supports small-batch customization (low-cost entry into the red light business), widely popular with wholesalers/brands




PL60

Model PL60	Power 91W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 60 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 2.5 Kg
Flicker No Flicker	G.W.(KG) 3.5 Kg	Unit Package Dimension 45*35*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 1pc	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 316*214*60mm(12.44"*8.43"*2.36")		
Wavelength 630/660/810/830/850nm(LED ratio: 6/24/3/3/24)customized wavelength		



PL180

Model PL180	Power 273W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 180 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 6.1 Kg
Flicker No Flicker	G.W.(KG) 8 Kg	Unit Package Dimension 107*30*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 3pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*195*60mm (35.8"*7.6"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength 630/660/810/830/850nm(LED ratio: 18/72/9/9/72)customized wavelength		

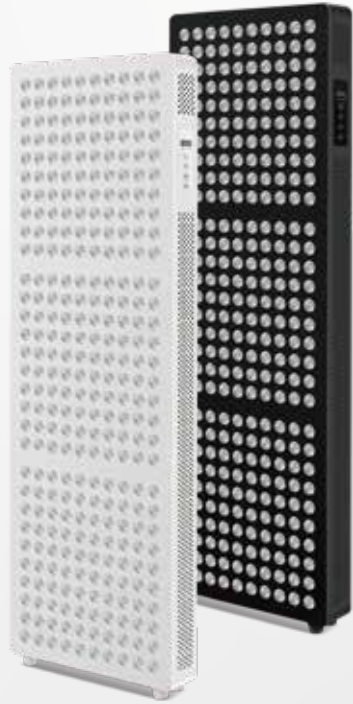


PL300

Model PL300	Power 455W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 300 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 8.7 Kg
Flicker No Flicker	G.W.(KG) 11 Kg	Unit Package Dimension 107*40*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 4pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*298*60mm (35.8"*11.7"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength 630/660/810/830/850nm(LED ratio: 30/120/15/15/120)customized wavelength		



PL1200

Model PL1200	Power 1800W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 1200 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 35 Kg
Flicker No Flicker	G.W.(KG) 45 Kg	Unit Package Dimension 195*58*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 18pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1800*580*60mm (70.87"*22.8"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength 630/660/810/830/850nm(LED ratio: 48/336/48/48/480)customized wavelength		

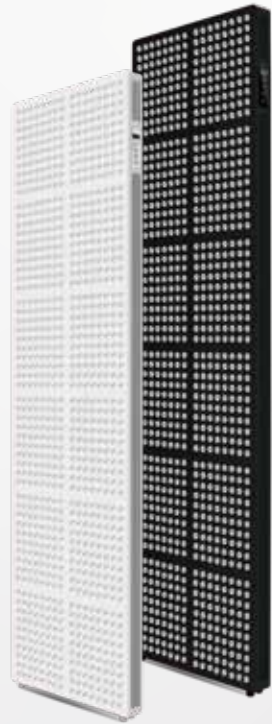

PL960

Model PL960	Power 1456W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 960 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 25 Kg
Flicker No Flicker	G.W.(KG) 32 Kg	Unit Package Dimension 195*58*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 12pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1800*473*60mm (70.87"*18.62"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength 630/660/810/830/850nm(LED ratio: 48/336/48/48/480)customized wavelength		



Product Details

Glow Light Series



Lamp Beads

Rather than using small 30mil chips, we opted for 38 – 45mil to provide a stronger and more consistent level of performance. We also use a 30° angle lens to reduce light wastage, ensuring you can take a full advantage of all lights that your device creates.




Poro Touch Screen Control System

A large central touchscreen allows you to control and customize your treatment with ease. Effortlessly select and adjust your session with a simple tap of the screen. Scroll through the various light therapy treatment options, modes, and intensities to choose what sounds right for your specific needs. You can even save your favorite presets to use again and again!



High-quality Material, High-quality Build

This full-body red light therapy device is made of iron shell, which has an excellent heat dissipation effect. The matte surface is more scratch-resistant and can keep your device looking brand new for a long time.

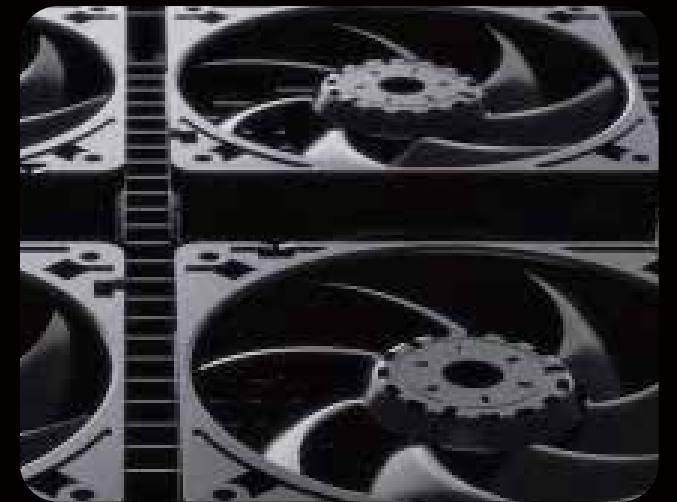


Patented Maximum Uptime Technology

Our state-of-the-art server fans are fitted around the device to ensure optimal airflow, keeping all the important components cool and working. Everything is designed with performance and user experience in mind. Not only that, but the advanced maximum uptime technology ensures long-term reliability for your device, making it not only treatment-efficient but cost-efficient too.

Red Light Therapy Panel

Glow Light Series

7-Wavelength Poro Touch Screen Control System

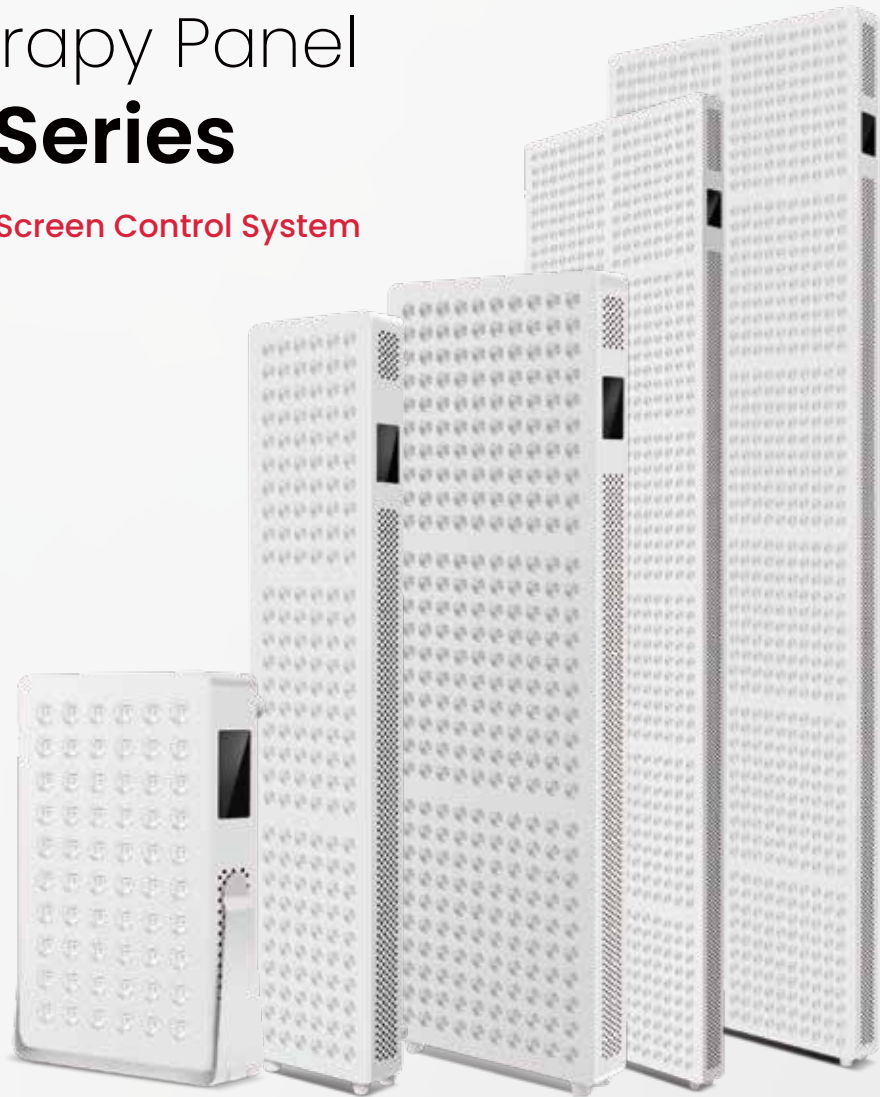

White Black
*Other colors available upon request

MDL FDA 510K TGA MDSAP UK CA ISO 13485 CE FC SGS RoHS ISO 9001 global-mark

- Glow Light Series: Iron with painting
- High cost-effectiveness, suitable for home and commercial use
- Ultra-high irradiance data (up to 110mw/cm2 by 6 inches as measured by a spectrometer)
- Ultra-high color screen resolution (up to 800dpi, vivid colors, 3-inch large screen)
- 7-wave/12-wave + custom wavelengths
- Supports timing/continuous lighting, dimming, pulse frequencies (0.1-10000hz)
- Comes with 6 preset modes and custom modes(supports renaming)
- Multiple units can be wirelessly synchronized (device/remote control)
- MOQ 1pc for free logo customization
- Can save and name up to 20 custom settings for easy recall later



GL60

Model GL60	Power 91W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 60 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 2.5 Kg
Flicker No Flicker	G.W.(KG) 3.5 Kg	Unit Package Dimension 45*35*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0µT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 1pc	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 316*214*60mm (12.44"*8.43"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm)customized wavelength		




GL180


Model GL180	Power 274W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 180 pcs
Input Voltage 100v~250v	Material Steel	N.W.(KG) 6.4 Kg
Flicker No Flicker	G.W.(KG) 8.5 Kg	Unit Package Dimension 107*30*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0µT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 3pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*195*60mm (35.8"*7.6"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm)customized wavelength		



Model GL300	Power 455W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 300 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 9.6 Kg
Flicker No Flicker	G.W.(KG) 12 Kg	Unit Package Dimension 107*40*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 4pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*298*60mm (35.8"*11.7"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		

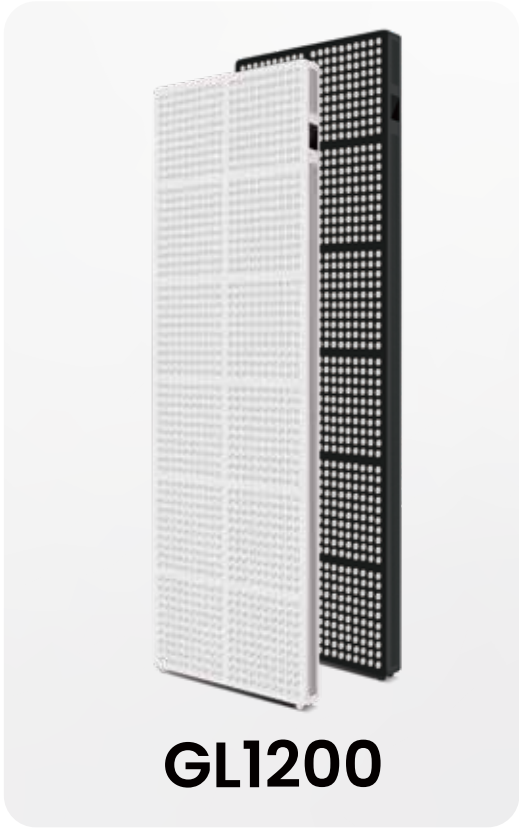

Model GL1200	Power 1820W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 220mw/cm²	Lifespan >100000 Hours	LED Quantity 1200 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 35 Kg
Flicker No Flicker	G.W.(KG) 45 Kg	Unit Package Dimension 195*73*17cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 18pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1800*580*65mm (70.9"*22.8"*2.6")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		

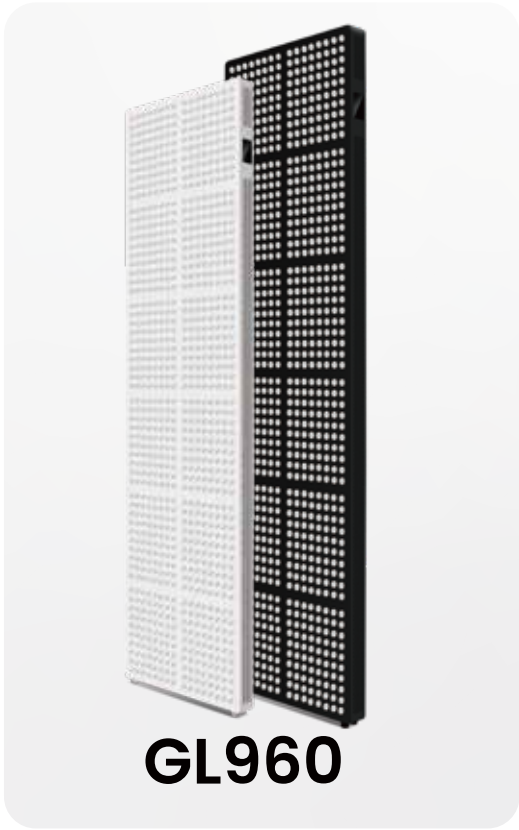

Model GL960	Power 1456W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 960 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 28 Kg
Flicker No Flicker	G.W.(KG) 35 Kg	Unit Package Dimension 195*58*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 12pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1800*473*60mm (70.87"*18.62"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



Red Light Therapy Panel Nora Series

5-Wavelength Nora Digital Control System



☐ White ☒ Black
*Other colors available upon request

MDL FDA 510K TGA MDSAP UK CA ISO 9001 CE FC SGS RoHS global-mark

Nora Series: Iron with painting

Ultra-simplified design, excellent surface coating

High cost-effectiveness, suitable for home and commercial use

5-wave/7-wave + custom wavelengths

Ultra-high irradiance data (up to 110mw/cm2 by 6 inches as measured by a spectrometer)

Supports small-batch customization (low-cost entry into the red light business), widely popular with wholesalers/brands



PL-96

Model PL-96	Power 146W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 96 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 3.8 Kg
Flicker No Flicker	G.W.(KG) 5 Kg	Unit Package Dimension 53x40x15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0µT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 1pc	Working Temperature -20°C~40°C	Warranty 2Years
Product size 340*298*60mm (13.38"*11.7"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (630/660/810/830/850nm)customized wavelength		



PL446

Model PL-446	Power 658W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 446 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 11.5 Kg
Flicker No Flicker	G.W.(KG) 15 Kg	Unit Package Dimension 108x50x15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0µT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 4pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*428*60mm (35.8"*16.85"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (630/660/810/830/850nm) customized wavelength		



PL-296

Model PL-296	Power 448W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 296 pcs
Input Voltage 100v-250v	Material Steel	N.W.(KG) 8.7 Kg
Flicker No Flicker	G.W.(KG) 11 Kg	Unit Package Dimension 107*40*15cm
Working Modes 1.Red+NIR 2.Red 3.NIR	EMF Emission 0µT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 4pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 910*298*60mm (35.8"*11.7"*2.36")	Timer 1-30Min	Remote Control Yes
Wavelength (630/660/810/830/850nm)customized wavelength		



Product Details

Elite Series



Powerful Panel Housing Design

Patented Cooling Technology: All LEDs in the full-body red light therapy device come with aluminum cooling fins to keep them at the optimum heat for high-level performance. These cooling fins keep the LEDs operating at that optimum temperature from the first minute you start the device until the end of your session



Pristine Touch Screen Control System

A large central touchscreen allows you to control and customize your treatment with ease. Effortlessly select and adjust your session with a simple tap of the screen. Scroll through the various light therapy treatment options, modes, and intensities to choose what sounds right for your specific needs. You can even save your favorite presets to use again and again!



Device Power Supply

The full-body red light therapy device converts electric current into the exact voltage and current needed for optimum treatment sessions. The device is also well-built and water-resistant power supply to prevent any external damage. Customized frequencies can be selected from 10/40/73/146/293/587Hz




Patented Maximum Uptime Technology

Our state-of-the-art server fans are fitted around the device to ensure optimal airflow, keeping all the important components cool and working. Everything is designed with performance and user experience in mind. Not only that, but the advanced maximum uptime technology ensures long-term reliability for your device, making it not only treatment-efficient but cost-efficient too.

Red Light Therapy Panel

Elite Series

7-Wavelength Pristine Touch Screen Control System

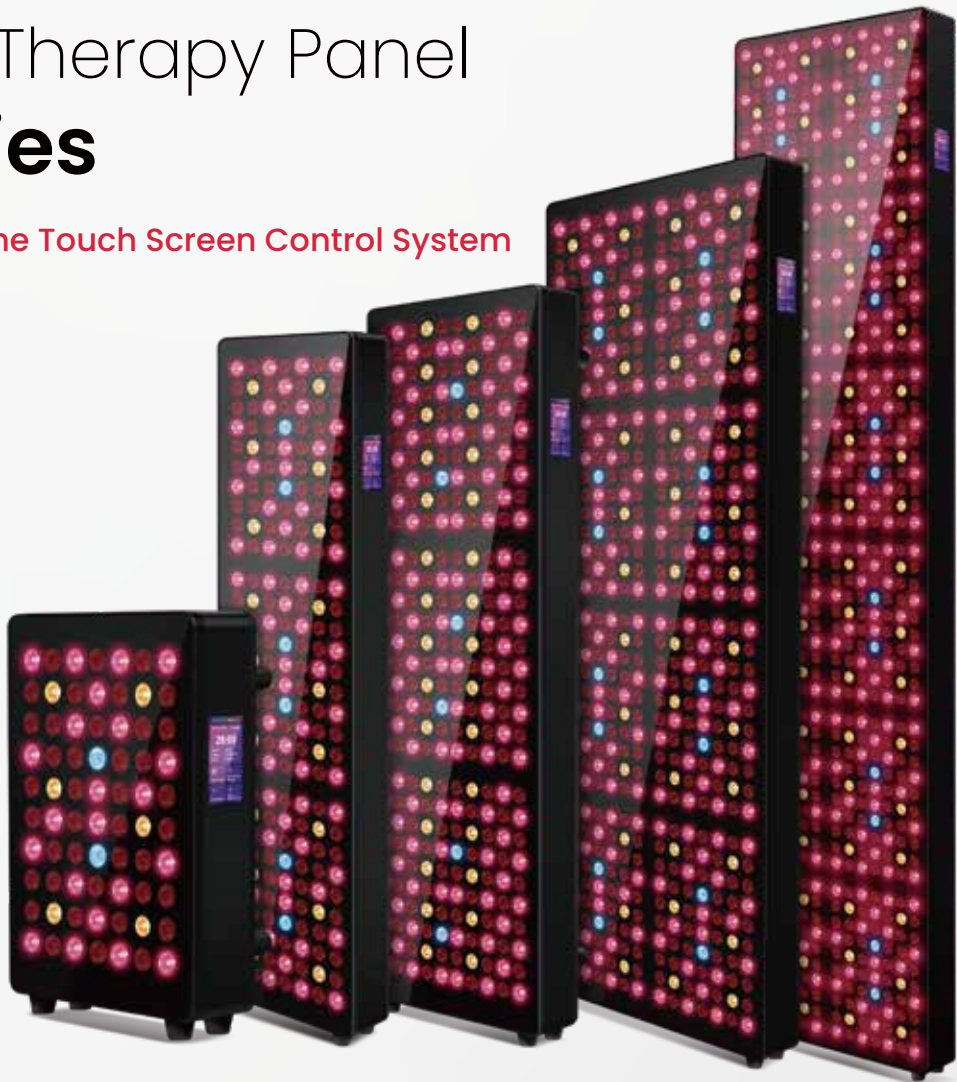

White Black
*Other colors available upon request

MDL FDA 510K TGA MDSAP UK CA ISO 13485 CE FC RoHS ISO 9001 global-mark

High-end commercial use

Ultra-high color screen resolution (up to 800dpi, vivid colors, 3-inch large screen)

5-wave/7-wave +custom wavelengths

Supports timing/continuous lighting, dimming, pulse frequencies (0.1-10000hz)

Comes with 6 preset modes and custom modes (supports renaming)

Oxidized aluminum alloy frame and full flat acrylic face, beautiful and elegant art-design, high-quality texture

Supports wireless synchronous working (device/remote control)

MOQ 1pc for free logo customization

6-year warranty

Can save and name up to 20 custom settings for easy recall later



EL70

Model EL70	Power 107W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 70 pcs
Input Voltage 100v-250v	Material Alloy Aluminum	N.W.(KG) 4.2 Kg
Flicker No Flicker	G.W.(KG) 5.5 Kg	Unit Package Dimension 45*35*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 1pc	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 318*216*71mm (12.52"*8.5"*2.8")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



EL210

Model EL210	Power 318W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 210 pcs
Input Voltage 100v-250v	Material Alloy Aluminum	N.W.(KG) 9.2 Kg
Flicker No Flicker	G.W.(KG) 11.5 Kg	Unit Package Dimension 103*30*16cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 2pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 876*216*71mm (34.45"*8.5"*2.8")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



EL300

Model EL300	Power 455W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 300 pcs
Input Voltage 100v-250v	Material Alloy Aluminum	N.W.(KG) 11.8 Kg
Flicker No Flicker	G.W.(KG) 14 Kg	Unit Package Dimension 103*37*16cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 2pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 876*216*71mm (34.45"*8.5"*2.8")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



EL840

Model EL840	Power 1274W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 840 pcs
Input Voltage 100v-250v	Material Alloy Aluminum	N.W.(KG) 32.5 Kg
Flicker No Flicker	G.W.(KG) 37 Kg	Unit Package Dimension 185*50*15cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 8pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1713*415*17mm (67.4"*16.3"*2.8")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



EL560

Model EL560	Power 850W	Lens Beam Angle 30 Degree
Irradiance at 6 inches 190mw/cm²	Lifespan >100000 Hours	LED Quantity 560 pcs
Input Voltage 100v-250v	Material Alloy Aluminum	N.W.(KG) 22.5 Kg
Flicker No Flicker	G.W.(KG) 26 Kg	Unit Package Dimension 130*51*16cm
Working Modes 1. Red/Nir/Blue 2. Any combination	EMF Emission 0μT @ 3inches	Sound(dB)@15cm 52 DB
Cooling Fans Quantity 4pcs	Working Temperature -20°C~40°C	Warranty 2 Years
Product size 1155*415*71mm (45.5"*16.3"*2.8")	Timer 1-30Min	Remote Control Yes
Wavelength (480/630/660/810/830/850/940nm) customized wavelength		



Electronic stand

Features:

- Automatically remote control
- 360° rotatable/vertical/horizontal available
- Suitable for all Azure RLT panels
- Design and function patented
- Electric adjustable height range: 70-170cm

☐ White ☒ Black
*Other colors available upon request



MDL FDA 510K TGA MDSAP UK CA CE FCC ISO 9001 global-mark

Unit Package Dimension 93×76x24cm	N.W.(KG) 26 Kg	G.W.(KG) 34 Kg	Input Voltage 100v-250v	Material Steel	Warranty 1 Year
--------------------------------------	-------------------	-------------------	----------------------------	-------------------	--------------------





Simple Stand

Features:

- Manual control
- Rotatable/vertical/horizontal use available
- Suitable for all panels
- Manual adjustable height range: 86-138cm

☐ White ☒ Black

*Other colors available upon request




MDL FDA 510K TGA MDSAP UK CA ISO 13485 CE FC ISO 9001 global-mark

Unit Package Dimension 78*64*12cm	N.W.(KG) 9 Kg	G.W.(KG) 12 Kg	Warranty 1 Year
--------------------------------------	------------------	-------------------	--------------------



Floor Stand

		
EL1000-S	EL1500-S	EL2400-S/EL3600-S
Unit Package Dimension 31×29x15cm	Unit Package Dimension 37×29x15cm	Unit Package Dimension 51×35x20cm
N.W.(KG) 1.2 Kg	N.W.(KG) 1.5 Kg	N.W.(KG) 2.6 Kg
G.W.(KG) 2 Kg	G.W.(KG) 2.5 Kg	G.W.(KG) 4 Kg
Warranty 1 Year	Warranty 1 Year	Warranty 1 Year

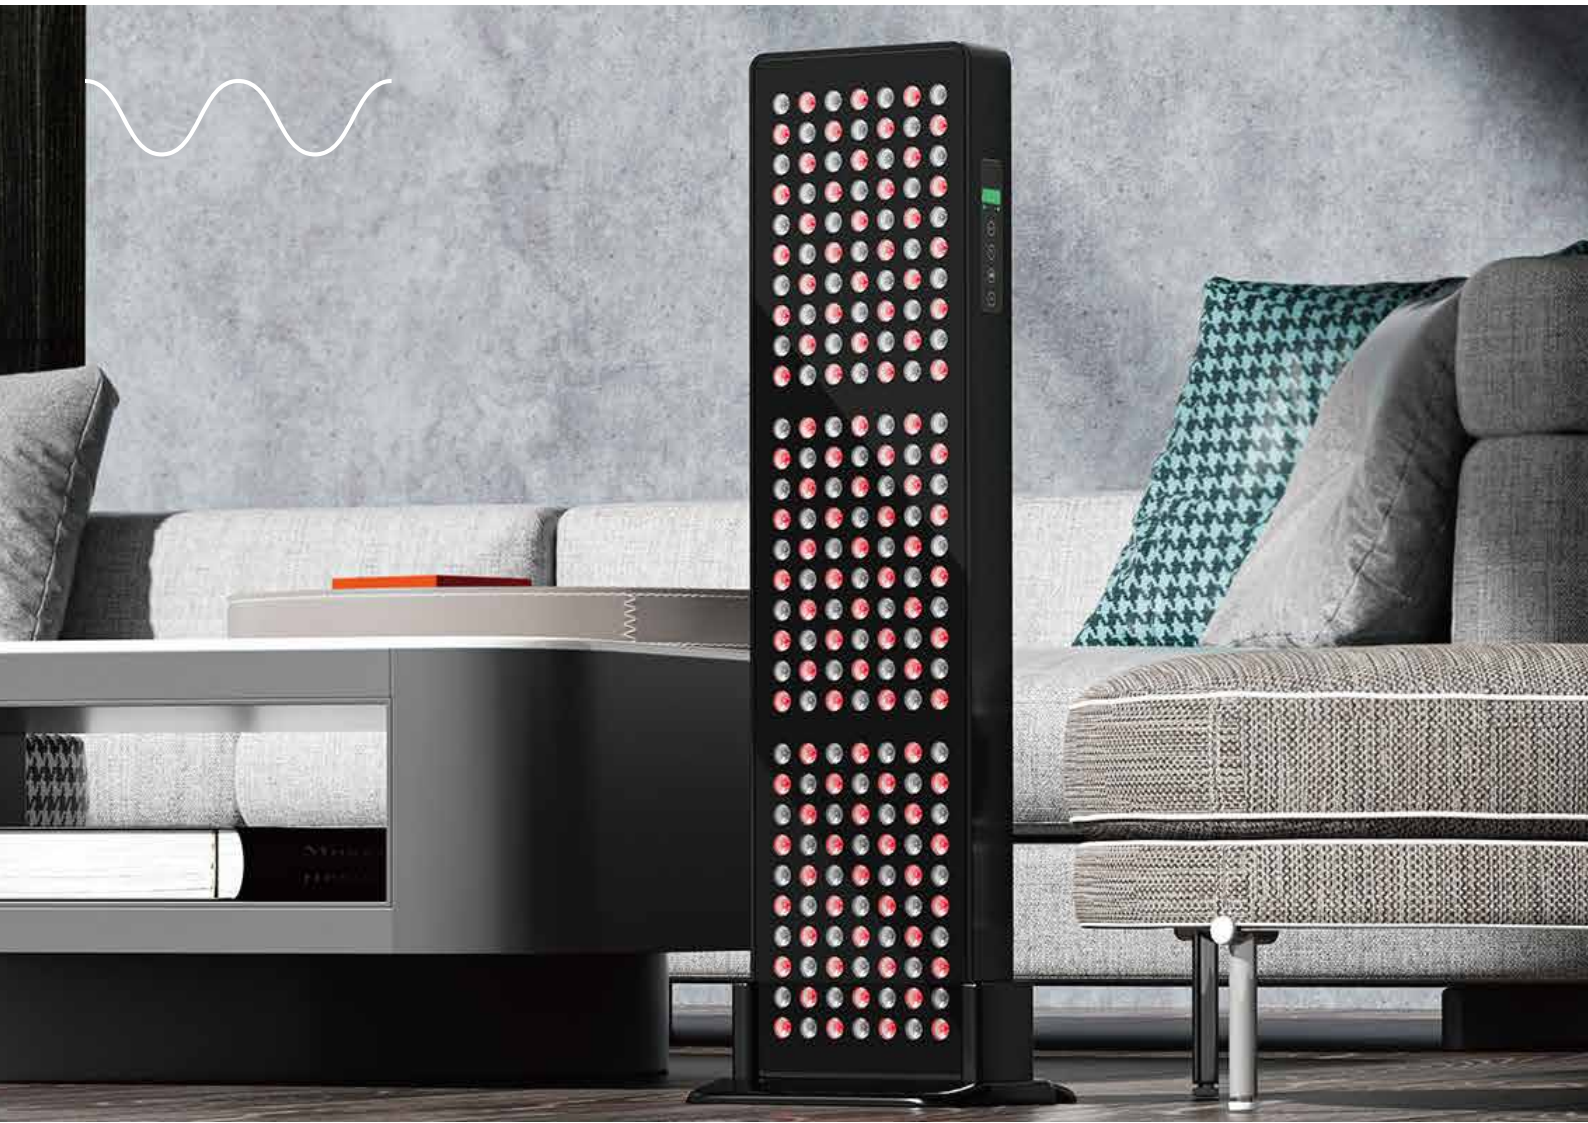

Floor Stand

			
PL1000-S	PL1000-SY	PL1500-S	PL1500-SY
Unit Package Dimension 22×22x4cm	Unit Package Dimension 22×22x5cm	Unit Package Dimension 32×22x4cm	Unit Package Dimension 32×22x5cm
N.W.(KG) 0.7 Kg	N.W.(KG) 0.9 Kg	N.W.(KG) 0.9 Kg	N.W.(KG) 1.1 Kg
G.W.(KG) 1Kg	G.W.(KG) 1.2Kg	G.W.(KG) 1.2 Kg	G.W.(KG) 1.4 Kg
Warranty 1 Year	Warranty 1 Year	Warranty 1 Year	Warranty 1 Year



Red Light Therapy Pet Cage



MDL FDA 510K TGA MDSAP UK CA CE FCC ISO 9001 global-mark

Model PT001	N.W.(KG) 17kg	G.W.(KG) 14.5kg	LED Quantity 120pieces	Packed size 69*49*60cm	Timer 30Min
Size 610*445*520mm	Rated Power 83W	Lens Angle 30degrees	Wavelength 630、660、810、830、850nm	Optical Power >200mW/cm2 (0distance)	Voltage and Current 100-240V0.85-0.35A

